



THREE-POINT MOUNTED DISC MOWERS



EOS





MANAGEABILITY AND RELIABILITY

SAFETY RELEASE

The EOS models all have a safety release that ensures automatic disengagement in the event of impacts. Its re-engagement is done wholly automatically without operator intervention by simply backing up.

HYDRAULIC LIFTING

The hydraulic lifting of the cutter bar at the end of the field is done by a hydraulic cylinder. For transport the mowing unit is folded vertically.



THREE-POINT MOUNTED DISC MOWERS

EOS

FIVE VERSIONS CURRENTLY AVAILABLE:

- EOS 165 - 4 discs working width 1.65m
- EOS 210 - 5 discs working width 2.10m
- EOS 245 - 6 discs working width 2.45m
- EOS 285 - 7 discs working width 2.85m
- EOS 320 - 8 discs working width 3.20m



A compensating spring provides excellent adjustment to the weight of the mower reducing the pressure on the ground to ensure a perfect cut without damaging the grassy scalp.


It is possible to mow on slopes and banks thanks to the mowing unit that tilts up to +40° and -35° (models 165-210-245-285)

A QUALITY CUT

The cutter bar is well-shaped with gears in an oil bath made from high-strength steel and wear-resistant chassis.

The dismantling of the disc mountings with their bearings and pinions is extremely easy for simple and fast maintenance.

The discs are shaped from special steel, designed for excellent penetration into all types of forage. In the overlap zone the blades are protected by deflection shields.

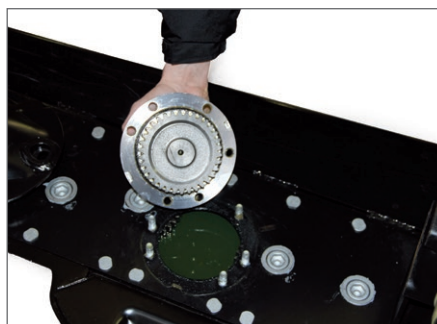

Specifications	EOS 165	EOS 210	EOS 245	EOS 285	EOS 320
Working width - cm	165	210	245	285	320
Number of discs	4	5	6	7	8
Number of knives	8	10	12	14	16
PTO SPEED	540/min	540/min	540/min	540/min	540/min
Safety release	Standard	Standard	Standard	Standard	Standard
Required power (HP/Kw)	22/30	27/36	32/43	42/55	64/85
Three-point hitch- category	II	II	II	II	II
PTO free-wheel shaft	Standard	Standard	Standard	Standard	Standard
Hydraulic vertical lifting	Standard	Standard	Standard	Standard	Standard
Tractor hydraulic equipment	1 SE	1 SE	1 SE	1 SE	1 SE
Mowing angle with tilt of +40/-35°	Standard	Standard	Standard	Standard	NO
Weight kg	340	410	500	550	600



www.tonuttigroup.com

TONUTTI WOLAGRI S.p.A.

Head Office and Production Plant

Via Gino Tonutti 3 - 33047
Remanzacco (UD) Italy
Phone + 39 0432 667015
Fax + 39 0432 668282
info@tonuttigroup.com

Production Plant

Via Veneto 12/A - 46029
Suzzara (MN) Italy
Phone +39 0376 51211
Fax +39 0376 522215
info@tonuttigroup.com

Tonutti U.S.A. Inc

1655 Panama Street
Memphis, TN 38108
Phone (901) 385 8841
Fax (901) 385 8288
info@tonuttiusa.com

Tonutti Russia T.W. Limited

3 Tekhnicheskaya Street
Perm, 614070 Russia
Phone 007 3422 909096
Fax 007 3422 909096
twltd@perm.ru

TONUTTI WOLAGRI S.p.A. reserves the right to make changes or add improvements at any time without notice.
The information contained here in is general in nature and is not intended for specific application purposes.

